



UNIVERSITI PUTRA MALAYSIA

**DEVELOPMENT OF GIS-BASED OIL SPILL DETECTION AND
MONITORING SYSTEM**

TEE TUAN POY

FK 2000 1

**DEVELOPMENT OF GIS-BASED OIL SPILL DETECTION AND
MONITORING SYSTEM**

By

TEE TUAN POY

**Thesis Submitted in Fulfilment of the Requirements for the Degree of
Master of Science in the Faculty of Engineering
Universiti Putra Malaysia**

May 2000



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirements for the degree of Master of Science

DEVELOPMENT OF GIS-BASED OIL SPILL DETECTION AND MONITORING SYSTEM

By

TEE TUAN POY

May 2000

Chairman: Associate Professor Shattri Mansor, Ph. D.

Faculty: Engineering

Geographical Information System (GIS) and remote sensing technologies were used to develop a GIS-based Oil Spill Detection and Monitoring System in this study. The system can be used to manage, identify, and predict oil movement when there is an incident of oil spill.

Historical oil spill data, accessibility of response team's information and prevention/protection methods were established and placed in GIS for rapid access, retrieval and query. However, the archive remotely sensed data from SPOT Panchromatic, SPOT XS, NOAA AVHRR, and Landsat TM were analysed to identify and derive valuable information such as location, quantity, and distribution of oil spill in the affected area. A simple oil trajectory model was incorporated into GIS context to predict the slick movement's magnitude and direction.

The developed GIS database contained over 15 layers of oil spill and coastal data. These data could be applied for mapping, overlay, classification, and integration analysis. As more data were collected, new layers could be produced, stored, and

updated. The oil slick could be identified from the SPOT Panchromatic and SPOT XS. Three criterias used to identify the oil slick were the location of incidence, size of the spill and the reflectance verification. Oil prediction trajectory showed a good predicted direction of slick movement on panchromatic image. In contrast, the SPOT XS result indicated the oil impinged on the shoreline before the image was captured.

The GIS-based system can be used to establish the appropriate response to locate the dense areas of slicks and for local surveillance, in order to permit clean-up vessels to detect the oil to be cleared rapidly. Also, it allows new opportunities for multiple resource planning, and permits the viewing of a state's natural resources. Therefore, the GIS-based system can consequently improve the decision-making process, and provide a baseline for future assessments.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains.

**PEMBINAAN SISTEM PENGESANAN DAN PENGAWASAN TERHADAP
TUMPAHAN MINYAK YANG BERDASARKAN PENGGUNAAN SISTEM
MAKLUMAT GEOGRAFI**

Oleh

TEE TUAN POY

Mei 2000

Pengerusi: Profesor Madya Shattri Mansor, Ph.D.

Fakulti: Kejuruteraan

Projek kajian ini membentang tentang penggunaan teknologi penderiaan jauh dan sistem maklumat geografi (GIS) dalam pengesanan dan pengawasan tumpahan minyak. Sistem ini boleh digunakan untuk mengurus, mengesan, dan menjangka pergerakan minyak ketika kecemasan tumpahan minyak berlaku.

Rekod berkaitan tumpahan minyak, penggunaan dan kaedah pencegahan dimasukkan dalam GIS untuk tujuan penggunaan, dapat semula serta pertanyaan. Manakala, data penderiaan jauh seperti SPOT Panchromatic, SPOT XS, NOAA AVHRR dan Landsat TM telah dianalisis untuk mengesan dan mendapatkan maklumat tentang lokasi, kuantiti, dan penyebaran minyak di sekitar tumpahan. Model pergerakan minyak diintegrasikan dalam sistem ini untuk meramalkan arah dan magnitud pergerakan minyak.

Kajian sistem maklumat geografi ini mengandungi lebih 15 lapisan data berkaitan maklumat tumpahan minyak dan data sekitar pantai. Ia boleh digunakan

untuk proses analisis seperti pemetaan, pertindihan, pengelasan serta integrasi. Lapisan baru boleh dibentuk jika terdapat maklumat baru. Dalam analisis pengesanan minyak dari imej satelit, hanya SPOT Panchromatic dan SPOT XS berjaya dikesankan. Ciri-ciri pengesanan tumpahan minyak dari imej-imej ini adalah berdasar pada tempat kejadian, saiz tumpahan minyak dan penggunaan kaedah pengesanan nombor digit pada imej-imej ini. Ramalan tentang pergerakan trajektori tumpahan minyak telah dilakukan pada imej SPOT Panchromatic dan SPOT XS, di mana imej SPOT Panchromatic telah menunjukkan keputusan pergerakan minyak yang seperti didapati pada imej. Tetapi keputusan yang berlawanan untuk imej SPOT XS, di mana, pergerakan tumpahan minyaknya telah menghampiri tepi pantai sebelum imej ini diambil.

Sistem maklumat geografi ini boleh digunakan untuk membuat satu tindakan yang sesuai kepada tumpahan minyak tentang lokasi minyak serta pengawasannya. Ia juga boleh memberi peluang baru dalam proses perancangan dan mempercepatkan proses membuat keputusan serta menyediakan dasar dalam penilaian masa hadapan.

ACKNOWLEDGEMENTS

I would like to extend my sincere gratitude to my supervisor, Assoc. Prof. Dr. Shattri Mansor for his continuous support and guidance, his trust, and his belief in my ideas and ability to complete this research study.

This project would be impossible without the valuable ideas of numerous people who have whole-heartedly offer their assistance. I am very grateful to my co-supervisors, Prof. Dr. Mohd Ibrahim Hj Mohd. and Dr. Abdul Rahman Ramli. I would also like to thank Mr. Maged Mohd for his interest and guidance in my project.

I would like to acknowledge the financial support of the PASCA Scheme fund from the Malaysian Government; the support from Universiti Putra Malaysia, Department of Environment (DOE), Malaysia Meteorological Service Department (MMS), Malaysia Centre of Remote Sensing (MACRES); and not forgetting the research assistants and technicians who have helped to make this project a success.

Last, but not least, my heartfelt gratitude to my parents, brothers, sisters, relatives, and my beloved friends for their support and encouragement.

I certify that an Examination Committee met on 9th May 2000 to conduct the final examination of Tee Tuan Poy on her Master of Science thesis entitled "Development of GIS-based Oil Spill Detection and Monitoring System" in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

BARKAWI SAHARI, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

SHATTRI MANSOR, Ph.D.


Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

MOHD. IBRAHIM HJ. MOHAMED, Ph.D.

Professor
Faculty of Science & Environmental Studies
Universiti Putra Malaysia
(Member)

ABD RAHMAN RAMLI, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Member)



MOHD. GHAZALI MOHAYIDIN, Ph.D.
Professor/Deputy Dean of Graduate School
Universiti Putra Malaysia

09 JUN 2000

This thesis was submitted to the Senate of Universiti Putra Malaysia and was accepted as fulfilment of the requirements for the degree of Master of Science.




KAMIS AWANG, Ph.D.
Associate Professor,
Dean of Graduate School
Universiti Putra Malaysia

Date: **13 JUL 2000**

DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.



(TEE TUAN POY)

Date: 7/06/2000

TABLE OF CONTENTS

	Page
ABSTRACT	ii
ABSTRAK	iv
ACKNOWLEDGMENTS.....	vi
APPROVAL SHEETS.....	vii
DECLARATION FORMS.....	ix
LIST OF TABLES	xii
LIST OF FIGURES	xiii
LIST OF ABBREVIATIONS.....	xvi
CHAPTER	
I	
INTRODUCTION	1
Oil Spills in Peninsular Malaysia	1
Oil Spill Management Problems.....	3
GIS-based System for Oil Spill Detection and Monitoring.....	4
Objective	6
II	
LITERATURE REVIEW	7
Geospatial Technologies and Oil Spill Management System	7
GIS Applications in Oil Pollution	9
Oil Spill Detection by RemoteSensing Techniques.....	11
Oil Spill Detection and Identification from Remotely Sensed Imagery.....	19
Oil Spill Trajectory	27
The Oil Spill Response System in Malaysia	30
Oil Spill Detection and Monitoring by the DOE.	31
Summary.....	32
III	
METHODOLOGY	35
Development Procedure of GIS-based Oil Spill Detection and Monitoring System.....	35
GIS Database Creation	38
Data Availability and Acquisition	39
Basemap Digitising	40
Database Design	40
Oil Spill Detection from Remotely Sensed Data.....	42
Geocoding of the Raw Data	44
Image Enhancement and Contrast Manipulation	45
Spatial Filtering	45
Oil Spill Trajectory Model.....	46
IV	
RESULTS AND DISCUSSION.....	49

Results.....	49
GIS Database.....	49
Oil Spill Analysis and Identification.....	54
Oil Spill Trajectory Model	73
Discussion	76
GIS – Spatial Database.....	76
Remotely Sensed Data.....	81
Oil Movement Prediction	86
Oil Spill Detection and Monitoring System (OSDMS)	88
The Functionality of Oil Spill Detection and Monitoring System.....	89
Monitoring	89
Assessment	91
Assistance	93
Information	94
 V CONCLUSIONS AND RECOMMENDATION.....	95
Conclusions	95
Recommendations	97
 REFERENCES.....	99
 APPENDIX	
 A Flow Chart of Tiered Response Oil Spill Contingency Plan	104
B EE Oilspill – Oil Spill Trajectory Model	105
C Satellite Information	106
D SPOT and LANDSAT TM Cloud Cover Illustrations..	107
E Oil Trajectory Computed Data using GIS.....	108
 VITA.....	109

LIST OF TABLES

Table		Page
1	Optical Properties of Seawater and Different Types of Oil.....	23
2	Information Content of the Oil Spill Detection and Monitoring system.....	41
3	RSO Projection Parameters for Malaysia.....	44
4	Image Acquisition based on Oil Spill Incident Records.....	55
5	Profile Table of DN Vs Distance at Selected Window X.....	62
6	Profile Table of DN Vs Distance at Selected Window Y.....	68
7	Predicted data of SPOT XS from 1 st October 1988 to 4 th October 1988.....	73
8	Predicted data of SPOT XS from 19 th February 1994.....	74

LIST OF FIGURES

Figure		Page
1	Malaysia: Annual Trend of Oil Spill Incidents, 1976 – 1995.....	2
2	Three Types of Marine Monitoring from Satellite Sensors.....	13
3	Theoretical Relationship between Brightness Temperature and Slick Thickness.....	17
4	CASI Images from the Sea Empress Oil Spill Using Near-infrared Red Channel	22
5	CASI False Colour Composite Images (Left) with Thermal Scene (Right).....	25
6	Thermal IR Grey-scale Values and the Corresponding Peaks to NIR Ratio along the Transect.....	26
7	Wind and Current Influence on Oil Spill Trajectory	28
8	Transformation of Data via Various Stages of the Total GIS Operation.....	36
9	Working Procedure of Developing a GIS-based Oil Spill Detection and Monitoring Model.....	37
10	Oil Spill Response (Equipment) Capability in Peninsular Malaysia...	50
11	Ports of Peninsular Malaysia.....	51
12	Department of Environment Offices in Peninsular Malaysia.....	52
13	Oil Spill Response Teams.....	53
14	Layer of Environmental Sensitive Areas - Coral Reef.....	54
15	Panchromatic Image Captured at Cherating, Kuantan.	59
16	Cloud Shadow (Area 1).....	60
17	Enlarged Scene of the Darker Slick near the Coastline (Area 2).....	60
18	Enlarged Scene of the Darker Slick near the Coastline (Area 3).....	61

19	Selected Window X: Pixel Vs Distance.....	61
20	Profile Graph DN Vs Distance for Visible Bands at Window X.....	62
21	Masking (SPOT XS).....	63
22	Lee Filter 3 x 3 (SPOT XS).....	63
23	Composite 321 RGB - SPOT XS Image of Kuala Paka.....	65
24	White Cloud Patches with Shadow Offset to the Northwest (Area1)	66
25	Wind Slick (Area 2).....	66
26	Oil Slick Signature in Area 3.....	67
27	Oil Slick Signature in Area 4.....	67
28	Window Y- Pixel Vs Distance.....	68
29	Profile Graph DN Vs Distance for Three Bands.....	69
30	Masking (Panchromatic).....	69
31	Lee Filter 3 x 3 (Panchromatic).....	70
32	Landsat TM Image Captured on 14th October 1995 at Kuala Lumpur, Straits of Malacca.....	70
33	Mosaic Image of Landsat TM Captured on 17th June 95 at Gemas	71
34	AVHRR Subscene Captured on 12th October 1996 in Peninsular Malaysia.....	72
35	Oil Trajectory Path of SPOT Panchromatic near Kuantan.....	73
36	Oil Trajectory Path of SPOT XS near Kuala Paka.....	74
37	Overlay Analysis.....	78
38	Map Composites of Environmental Sensitive Areas.....	79
39	Classification of Oil Spill Incidents.....	80
40	Map Composite of Environmental Sensitive Areas with Oil Spill Incident Classification.....	81
41	Interaction Mechanisms among Oil, Water and Electromagnetic at Visible and Reflected IR Region.....	84

42	Oil Spill Detection and Monitoring System.....	90
43	Integration Image in GIS Context.....	92



LIST OF ABBREVIATIONS

AM/FM	Automated Mapping and Facilities Management
AVHRR	Advanced Very High Resolution Radiometer
CASI	Compact Airborne Spectrographic Imager
CS	Climate and Stochastic
DN	Digital Number
DOE	Department of Environment
DV	Digital Value
DWG	Drawing File
DXF	Digital Exchange File
EEZ	Economic Exclusive Zone
ER	Emergency Response
ERS	European remote sensing satellite
ESI	Environmental Sensitivity Index
GIS	Geographical Information System
GMT	Greenwich Mean Time
GPS	Global Position Systems
HFO	Heavy Fuel Oil
IR	Infra Red
Landsat TM	Landsat Thematic Mapped
MACRES	Malaysia Centre of Remote Sensing
MMS	Malaysia Meteorological Services Department
MSMM	Maximum Shape-Matching Method
MWR	Microwave Radiometry
NOAA	National Oceanic and Atmospheric Administration

NOSCP	National Oil Spill Contingency Plan
OSC	On-Scene Commander
OSDMS	Oil Spill Detection and Monitoring System
PIMMAG	Petroleum Industry of Malaysia Mutual Aid Group
RMAF	Royal Malaysia Air Force
RSO	Rectified Skew Orthomorphy
SAR	Synthetic Aperture Radar
SLAR	Side-Looking Airborne Radar
SPOT XS	SPOT Multispectral Scanner
UV	Ultraviolet

CHAPTER I


INTRODUCTION

Oil Spills in Peninsular Malaysia

The marine pollution issue in Malaysia is one of the critical environmental problems we face, which is gaining more and more attention from the public. Marine pollution, especially oil spillage from oil production at offshore, tanker accidents, and discharge at ports has increased over the years (Figure 1). It has become a constant threat to the coastal ecosystem of Malaysia. This oil pollution will damage the coastal natural resources, such as coral reefs, mangroves, beaches and many rare wildlife species. In the mean time, the pollution also affects the livelihood of coastal residents whose remunerative income depends on fisheries and aquaculture activities significantly.

Among the agencies or organisations concerned about the oil pollution problems in Malaysia are the Department of Environment (DOE), Marine Department, Fisheries Department, Shipping authorities, private oil companies, and local universities that are interested in research and development activities. These agencies have put in a lot of efforts in the on-going research and the collection of spillage records, effects of marine pollution, oil spill trajectory, and the development of

a response system. For example, the DOE has constituted a National Oil Spill Contingency Plan (first developed in 1976) which included the development of local oil spill strategies to aid in the oil spill response. The efforts have yet to provide a clear picture of this issue, which tag on the tail of the development.

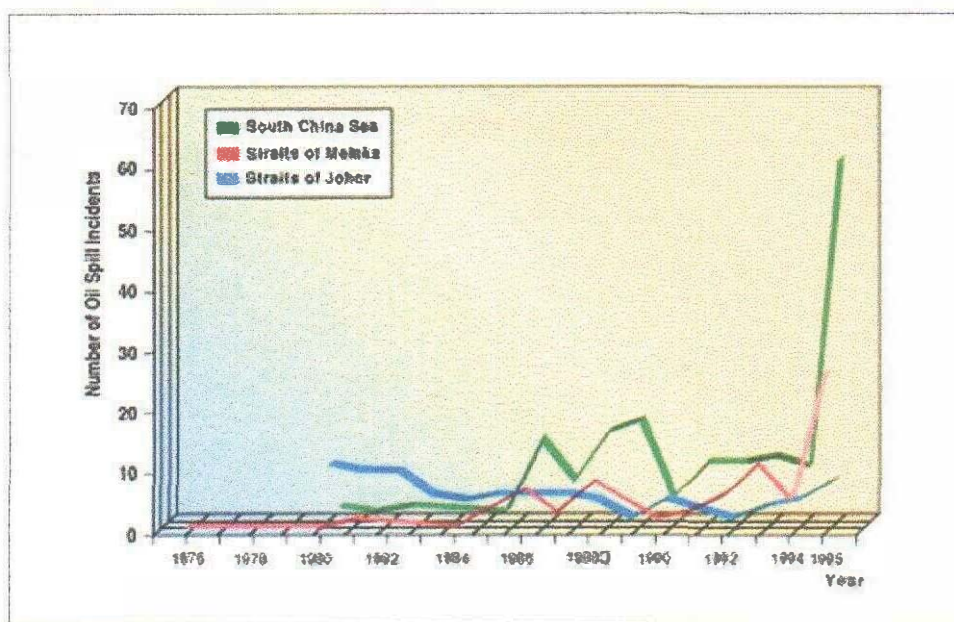

Source: DOE Report (1995)

Figure 1: Malaysia: Annual Trend of Oil Spill Incidents, 1976 - 1995

With the amounting concern over this marine problem, these agencies have been relentlessly gathering large amount of oil pollution data and developing rescue strategies from the spillage incidents. Almost invariably, the data and plans need to be analysed, and a spatial database is needed to contain all the information.

Oil Spill Management Problems

Oil Spill and marine pollution management in Malaysia is under the responsibility of the DOE. The department is responsible to conduct the marine pollution surveillance and monitoring, regulating enforcement as well as containment procedure during an incident. The DOE has constituted an Oil Spill Contingency Plan to contain the spillage problem at Malaysian water and Economic Exclusive Zone (EEZ). But, DOE has faced some problems in current oil spill monitoring and response system such as high operational cost and limitation of using aircraft in monitoring and surveillance at coastal areas. Moreover, the problems also include lacking proper communication system such as networking, telemetry system, and comprehensive database for mapping and retrieving the needed information in oil spill response management.

As we know that information such as the position, extent, and the sources of oil spill is crucial for operational oil spill incident in emergency situations. It is important to identify the sources and risk in a spillage in order to formulate counter response for emergency situations immediately. Existing problems include integrating critical data for emergency management prior to impact, the immediate post-impact response period, the recovery period and the opportunity for mitigation. In addition, oil spill incident covers a large extent of spatial area. Thus, it is essential to have a spatial response management system that can manage the large collection of spatial geographic information and compile the data for analysis. The response

management system should allow faster access for emergency co-ordinators to the best information as soon as possible in the current oil spills management system.

GIS-based System for Oil Spill Detection and Monitoring

Fortunately, for the past two decades, coastal and marine applications have benefited from information derived from commercial satellite imagery, and Geographical Information System (GIS) has been used as a powerful tool in managing oil pollution at coastal areas. The GIS possesses the capability for dealing with complex relationships, storing, updating, analysing, integrating, and displaying geographical information. GIS can provide well-organised and informative retrievable spatial data for the management and the handling of oil spill problems as well as a platform for integrating the remotely sensed data. The GIS also has an emergency oil trajectory model for predicting oil slick movement.

In view of the significant role of the GIS in oil pollution management, this study focuses on work done in utilising GIS and remotely sensed data to identify and manage oil spill incidents in Peninsular Malaysia. The GIS-based oil spill detection and monitoring system has been developed in order to assist rapid and effective decision making in oil spill containment and cleaning up operations in coastal areas of Peninsular Malaysia.

Oil spill data, infrastructure utilities and access, and protection information has been built and placed in the GIS database for rapid access, retrieval, and analysis

purposes. Remotely sensed data especially from optical satellites such as Landsat TM, SPOT Multispectral Scanner (XS), SPOT Panchromatic, and AVHRR have been collected and analysed in order to derive the valuable information about the spillage cases. Information could be acquired from images such as the location of the oil spills, the size of oil spills, and the distribution of this oil spill in the affected area. Hence, the remotely sensed data has played a spatial input role to the GIS database in providing position information to oil slick prediction.

A simple linear oil slick movement model has been incorporated into this GIS database environment for predicting oil slick movement direction and the time takes to reach the shoreline or sensitive areas. Wind, current and tide are the main parameters for this model. This prediction provides a basic guidance of slick flow to the response co-ordinator in containing emergency spillage.

With the development of these three component: GIS database, oil spill identification from remotely sensed data, and oil slick movement prediction, this GIS-based oil spill detection and monitoring system can be used to locate the dense areas in a slick, and permitting clean-up vessels to detect the oil to be cleaned in rapid circumstances. Besides, this system allows new opportunities for assessment, multiple resource planning, viewing of natural resources, improving decision making, and providing a baseline for future assessments.

Objectives

The project aims to develop a GIS-based oil spill detection and monitoring system for coastal areas in Peninsular Malaysia with the integration of remotely sensed data and trajectory model for predicting oil slick movement.

The specific objectives are:

1. to develop an information system for managing oil spill problems;
2. to identify oil slick using images acquired from satellites;
3. to predict oil slick movement.

CHAPTER II

LITERATURE REVIEW

Geospatial Technologies and Oil Spill Management System

Management requires information. Geospatial technologies such as GIS, remote sensing (aerial and satellite imaging of Earth, radar and sonar), global position systems (GPS), automated mapping and facilities management (AM/FM), and digital navigation are found applicable in most of the diverse disciplines and national missions associated with coastal management. Coastal management is one type of spatial management. Spatial management means the distribution and allocation of space, ultimately of parcel of land, to alternative uses or activities, or the control of processes that in turn may affect space, such as emissions (Fedra and Feoli, 1998).

Mckee et al. (1998) explain that geospatial technologies are important in coastal zone management because of resources, activities, and natural conditions can be represented digitally. This means that information about them can be:

1. collected by means of remote sensing using wireless communication to devices with sensors. The devices may be fixed firmly, or mobile with wireless communication devices reporting their GPS determined locations and sensed values.